


**XLAM-414/SC XLAM-414/SC/SIL**

Highly flexible, fully shielded adapter leads. One end with coaxial cable with touch-protected BNC male connector, other end

with in-line Ø 4 mm MULTILAM plugs with rigid insulating sleeve.

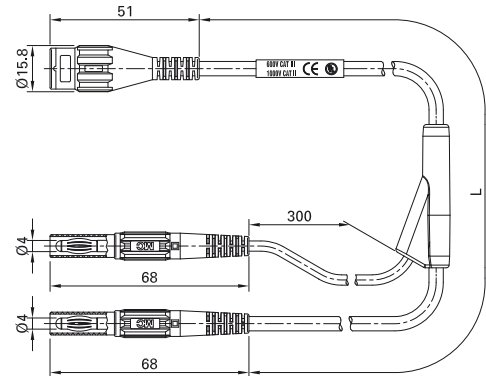

Order No.	Type		Lead lengths L [cm]	Colour
67.9842- <input type="checkbox"/>	XLAM-414/SC	<b>Au Ni PVC</b>	<b>100 160</b>	
67.9867- <input type="checkbox"/>	XLAM-414/SC/SIL	<b>Au Ni SIL</b>	<b>100 160</b>	

Technical Data		
Type	XLAM-414/SC	XLAM-414/SC/SIL
Rated voltage	1000 V, CAT II (600 V, CAT III)	1000 V, CAT II (600 V, CAT III)
Capacity (f = 100 kHz)	100 pF (L = 100 cm) 160 pF (L = 160 cm)	150 pF (L = 100 cm) 240 pF (L = 160 cm)
Inductance (f = 100 kHz)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)
Coaxial lead (Type) / Insulation	RG58 / PVC	SILI-SC 0,5/1,0 / Silicon
Temperature range	-10°C ... +70°C	-50°C ... +150°C