



Test lead LK4...

Highly flexible, with stackable Ø 4 mm MULTILAM plugs on both ends.

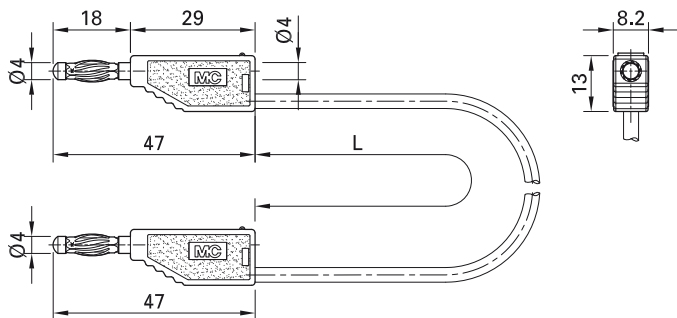

| Order No. | Type | Rated voltage/current | Lead | User information | | Lead lengths L [cm] | *Standard colors |
|------------|-------------|--------------------------------|-------------------------|------------------|----|---------------------|------------------|
| 28.0060-□* | LK410 | 30 VAC / 19 A 60 VDC / 19 A | PVC 1.0 mm ² | i096 | Au | 100 | 21 22 |
| 28.0061-□* | LK410/SIL | 30 VAC / 19 A 60 VDC / 19 A | SIL 1.0 mm ² | i096 | Au | 050 | 21 22 |
| 28.0073-□* | LK425-A | 30 VAC / 32 A 60 VDC / 32 A | PVC 2.5 mm ² | i099 | Au | 050 100 200 | 21 22 23 |
| 28.0074-□* | LK425-A/SIL | 30 VAC / 32 A 60 VDC / 32 A | SIL 2.5 mm ² | i099 | Au | 100 | 21 22 |

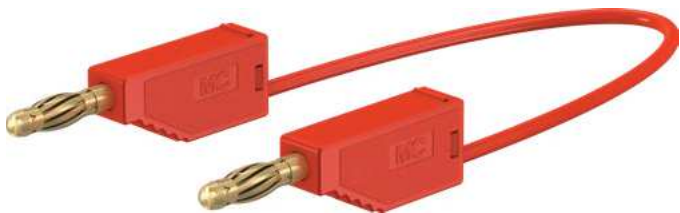

Optional colors **20** **23** **24** **25** **26** **27** **28** **29**

Optional lengths on demand

Further information, page 6



User information **i096**, **i099**

www.staubli.com/electrical