


Test Lead SLK4...-E...

Highly flexible, with insulation in PVC or silicone with stackable Ø 4 mm MULTILAM

plugs with rigid insulating sleeve on both ends.

SLK4...-E...

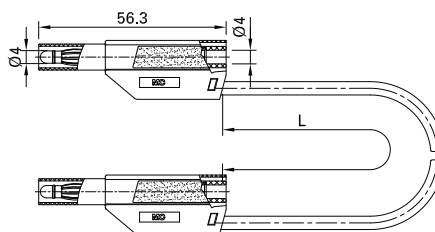

| Order No. | Type | Rated voltage/current | Lead | | Lead lengths L [cm] ¹⁾ | *Colors ¹⁾ |
|------------|----------------|------------------------------------------------|--------------------------|---------------|-----------------------------------|----------------------------------|
| 28.0127-□* | SLK4075-E/N | 1000 V, CAT II / 15 A 600 V, CAT III / 15 A | PVC 0,75 mm ² | Ni CE c UL US | 025 050 075 100 150 200 | 20 21 22 23 24 25 26 27 28 29 |
| 49.0126-□* | SLK410-E/N | 1000 V, CAT II / 19 A 600 V, CAT III / 19 A | PVC 1,0 mm ² | Ni CE c UL US | 025 050 075 100 150 200 | 20 21 22 23 24 25 26 27 28 29 |
| 28.0126-□* | SLK410-E/SIL | 1000 V, CAT II / 19 A 600 V, CAT III / 19 A | SIL 1,0 mm ² | Au CE c UL US | 025 050 075 100 150 200 | 21 22 23 |
| 49.0079-□* | SLK410-E/N SIL | 1000 V, CAT II / 19 A 600 V, CAT III / 19 A | SIL 1,0 mm ² | Ni CE c UL US | 025 050 075 100 150 200 | 20 21 22 23 24 25 26 27 28 29 |
| 28.0124-□* | SLK425-E | 1000 V, CAT II / 32 A 600 V, CAT III / 32 A | PVC 2,5 mm ² | Au CE c UL US | 025 050 075 100 150 200 | 20 21 22 23 24 25 26 27 28 29 |
| 28.0125-□* | SLK425-E/N | 1000 V, CAT II / 32 A 600 V, CAT III / 32 A | PVC 2,5 mm ² | Ni CE c UL US | 025 050 075 100 150 200 | 20 21 22 23 24 25 26 27 28 29 |

¹⁾ Other color and/or length combinations available on request.